

AS-2500-1
Telecommunication
Watch Dog
Version 2.70

Table of Content

TABLE OF CONTENT	2
INTRODUCTION	3
FEATURES	3
INSTALLATION.....	3
PROGRAM MODE.....	3
• Changing the maximum number of rings	4
• Verifying the maximum number of rings	4
• Changing the maximum off hook time	4
• Verifying maximum off hook time	4
• Adjustable buffer timer.....	5
• Changing the buffer timer.....	5
• Verifying the buffer timer.....	5
PROGRAMMING NOTE	5
NORMAL OPERATION.....	5
RESET INDICATION	5
TECH SUPPORT - 916-786-6186	6
WARRANTY	6

Introduction

If you are experiencing intermittent computer lock up problems with either your computerized voice application or modem, then this is the product that you have been dreaming about. When a lock up condition is detected the AS2500-1 will automatically reset your computer and will keep track of the total number of times that your system has locked up. This gives you the ability to debug your problem without losing service to your voice or modem application. Best of all, you don't need to make any modifications to your existing software to use the AS2500-1. The AS2500-1 monitors the duration of the "OFF HOOK" state, and the number of "RINGS" on your primary telephone line. If the computer fails to answer a call within a pre-determined number of rings, or stays in the "OFF HOOK" state for over a pre-determined amount of time, the AS2500-1 will automatically reset your computer, and your software will re-boot.

There are two different methods in which the AS2500-1 can reset your computer. The AS2500-1 has a switched power outlet on the rear of the unit. If you connect the power cord from your computer to this outlet, the AS2500-1 will disconnect power to your computer for a 20 second period every time that it detects a reset condition. This 20 second period provides time for your computers power supply and hard drive to power down before it re-applies power.


The AS2500-1 also has a fully isolated pair of relay contacts that can be connected directly across your computers RESET switch. The AS2500-1 provides a 2 second closure across these contacts when a reset condition is detected.

The power LED on the front of the AS2500-1 flashes to indicate the number of times that the AS2500-1 has detected a reset condition. The system setup information and number of resets, are stored in a non-volatile memory device that retains the data for up to 100 years without power. This helps to make the AS2500-1 a reliable tool that you can count on when you need it.

Features

- **No software modifications needed for operation**
- **Maximum RINGS user programmable from 1 to 99**
- **Maximum OFF HOOK state user programmable from 1 to 999 minutes**
- **Non-volatile ram retains reset and programmed info for up to 100 years**
- **Keeps track of total number of reset conditions**
- **Two different methods provided to reset your computer**
- **Easy to install**

Installation

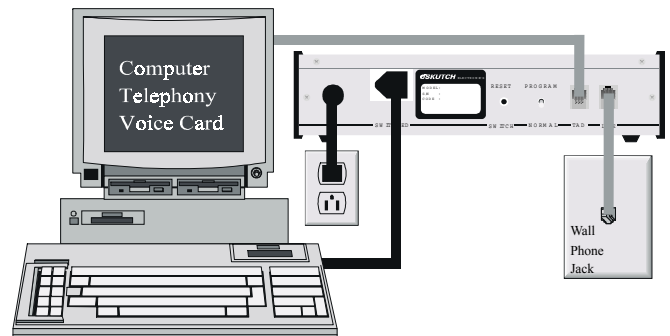

- 1) Connect the male phone cord, that came with the unit, to the jack on the rear of the unit, labeled "TELEPHONE LINE". Connect the other end to your RJ-11 or RJ-14 telephone jack.
- 2) Connect your main voice card line to the jack, on the rear of the AS2500-1, labeled "DEVICE".
- 3) Next, either plug the power cord from your computer to the power jack on the back of the unit, or connect the control cable, that came with the unit, to the RESET button on your computer.

Program Mode

The AS2500-1 has the ability to monitor for two different types of conditions. It can monitor the number of times that the telephone line rings, and the amount of time that the telecommunication device that is connected to it, stays in the "OFF HOOK" state. You have the ability to use either one, or both of these monitoring conditions as you see fit.

• Changing the maximum number of rings

- 1) Change the PROGRAM switch on the rear of the AS2500 to the UP or PROGRAM position. The LED on the front of the AS2500-1 will start flashing to indicate that you are in the PROGRAM MODE.
- 2) Call the telephone line that the AS2500-1 is connected to, from a touch tone telephone. The unit will answer after the first complete ring, then the AS2500-1 will play a START tone.
- 3) After the START tone has stopped, press the [#] key followed by the maximum number of rings, followed by another [#] tone. The entry can be from 0 to 99. A value of 0 will disable the RING DETECT function. For example, if you wanted to make the maximum rings equal to 15, you would press the following keys after the end of the START tone:

[#] [1] [5] [#]

A maximum of 5 rings would be entered like:

[#][5][#]

- 4) If you wish to disable the RING detect function simply enter 0 for the number of rings by entering:

[#][0][#]

- 5) After you are finished simply hang up and the AS2500-1 will automatically disconnect after 10 seconds.
- 6) After you are finished return the PROGRAM switch to the down or NORMAL position.

• Verifying the maximum number of rings

- 1) Change the PROGRAM switch on the rear of the AS2500 to the UP or PROGRAM position. The LED on the front of the AS2500-1 will start flashing to indicate that you are in the PROGRAM MODE.
- 2) Call the telephone line that the AS2500-1 is connected to, from a touch tone telephone. The unit will answer after the first complete ring, then the AS2500-1 will play a START tone.
- 3) After the START tone has stopped, press [#] [#]. The AS2500-1 will play back the MAXIMUM RINGS via a series of short beeps. A 0 is indicated by 10 short beeps. For example if the maximum rings was 14. The unit would beep once, pause 3 seconds, then beep 4 times.

- 4) After you are finished simply hang up and the AS2500-1 will automatically disconnect after 10 seconds.
- 5) After you are finished return the PROGRAM switch to the down or NORMAL position.

• Changing the maximum off hook time

- 1) Change the PROGRAM switch on the rear of the AS2500 to the UP or PROGRAM position. The LED on the front of the AS2500-1 will start flashing to indicate that you are in the PROGRAM MODE.
- 2) Call the telephone line that the AS2500-1 is connected to, from a touch tone telephone. The unit will answer after the first complete ring, then the AS2500-1 will play a START tone.
- 3) After the START tone has stopped, press the [*] key followed by the maximum number of minutes, followed by another [*] tone. The entry can be from 0 to 999 minutes. A value of 0 will disable the OFF HOOK detect function. For example, if you wanted to make the maximum OFF HOOK time 120 minutes, you would press the following keys after the end of the START tone:

[*][1][2][0][*]

A maximum of 5 minutes would be entered as follows:

[*][5][*]

- 4) If you wish to disable the OFF HOOK DETECT function simply enter 0 for the maximum OFF HOOK minutes as follows:

[*][0][*]

- 5) After you are finished simply hang up and the AS2500-1 will automatically disconnect after 10 seconds.
- 6) After you are finished return the PROGRAM switch to the down or NORMAL position.

• Verifying maximum off hook time

- 1) Change the PROGRAM switch on the rear of the AS2500 to the UP or PROGRAM position. The LED on the front of the AS2500-1 will start flashing to indicate that you are in the PROGRAM MODE.
- 2) Call the telephone line that the AS2500-1 is connected to, from a touch tone telephone. The

unit will answer after the first complete ring, then the AS2500-1 will play a START tone.

- 3) After the START tone has stopped, press [*] [*]. The AS2500-1 will play back the MAXIMUM OFF HOOK minutes via a series of short beeps. A 0 is indicated by 10 short beeps. For example if the maximum rings was 120. The unit would beep once, pause 3 seconds, then beep 2 times, pause 3 seconds then beep 10 times.
- 4) After you are finished simply hang up and the AS2500-1 will automatically disconnect after 10 seconds.
- 5) After you are finished return the PROGRAM switch to the down or NORMAL position.

• Adjustable buffer timer

After your computer has reset, it may take a few minutes before the computer re-boots up your application and is ready to process calls again. The AS2500-1 has a built in user programmable timer to help deal with this situation. After the computer has rebooted, it will wait a pre-determined amount of time before it starts to monitor again. The timer is programmed in tenth of minute increments from .1 to 9.9 minutes.

• Changing the buffer timer

- 1) Change the PROGRAM switch on the rear of the AS2500 to the UP or PROGRAM position. The LED on the front of the AS2500-1 will start flashing to indicate that you are in the PROGRAM MODE.
- 2) Call the telephone line that the AS2500-1 is connected to, from a touch tone telephone. The unit will answer after the first complete ring, then the AS2500-1 will play a START tone.
- 3) After the START tone has stopped, press the [#] key followed by the maximum number of tenths of minutes, followed by another [*] tone. The entry can be from 0 to 999 minutes. For example, if you wanted to make the buffer period equal to 1.5 minutes, you would press the following keys after the end of the START tone:

[#][1][5][*]

A 3 minute buffer period would be entered as follows:

[#][3][0][*]

- 4) After you are finished simply hang up and the AS2500-1 will automatically disconnect after 10 seconds.
- 5) After you are finished return the PROGRAM switch to the down or NORMAL position.

• Verifying the buffer timer

- 1) Change the PROGRAM switch on the rear of the AS2500 to the UP or PROGRAM position. The LED on the front of the AS2500-1 will start flashing to indicate that you are in the PROGRAM MODE.
- 2) Call the telephone line that the AS2500-1 is connected to, from a touch tone telephone. The unit will answer after the first complete ring, then the AS2500-1 will play a START tone.
- 3) After the START tone has stopped, press [#] [*]. The AS2500-1 will play back the BUFFER TIMER in tenths of minutes via a series of short beeps. A 0 is indicated by 10 short beeps. For example if the buffer timer was set to 1.5 minutes, the unit would beep once, pause 3 seconds, then beep 5 times.
- 4) After you are finished simply hang up and the AS2500-1 will automatically disconnect after 10 seconds.
- 5) After you are finished return the PROGRAM switch to the down or NORMAL position.

Programming note

After each programming or verification function is complete, the AS2500-1 issues another START tone. If you wish to perform multiple programming and/or verification operations you can issue new commands after the AS2500-1 issues a new START tone. Simply wait for the START tone to stop before issuing a new command.

Normal operation

For normal operation, the PROGRAM switch on the rear of the AS2500-1 MUST be in the down position.

Reset indication

The LED on the front panel of the AS2500-1 will indicate if it has detected any reset conditions.

In this case, every 2.5 seconds the LED will wink the number of times that the AS2500-1 has reset the computer. For example if the unit has reset 1 time, the LED will wink one time every 2.5 seconds. If the unit has reset 5 times, the LED will wink 5 times every 2.5 seconds.

The reset counter is cleared by momentarily switching the PROGRAM switch on the back of the AS2500-1 to the UP or PROGRAM position. The unit will retain the RESET count even if the unit is disconnected from power.

SHALL SKUTCH ELECTRONICS BE LIABLE FOR LOSS OF PROFITS OR BENEFITS, INDIRECT, SPECIAL, CONSEQUENTIAL OR OTHER SIMILAR DAMAGES ARISING OUT OF ANY BREACH OF THIS WARRANTY OR OTHERWISE.

**Tech Support -
916-786-6186**

If you have any problems getting the unit to work properly feel free to give us a call. Technical Support is available between the hours of 7:30 AM and 4:30 PM Pacific Time, Monday through Friday.

WARRANTY

This SKUTCH PRODUCT is warranted against defects for a period of one (1) year from the date of the original invoice. Within this period, we will repair it without charge for parts and labor. To obtain warranty service the product must be returned, at the customer's expense, to SKUTCH Electronics along with a copy of the original invoice. After the unit has been repaired, SKUTCH will ship the PRODUCT back via UPS GROUND service at our expense. If any other form of return shipment is requested, the customer will pay for 100% of the shipping cost.

This Warranty does not apply if in the sole opinion of SKUTCH Electronics, the PRODUCT has been damaged by lightning or any other Acts of God, or by accident, misuse, neglect, or improper packing, shipping, modification or servicing by other than an authorized SKUTCH Service Center.

EXCEPT AS SPECIFICALLY PROVIDED IN THIS AGREEMENT, THERE ARE NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND IN NO EVENT